





MAZDA BT-50 SINGLE CAB XS

- » Cab chassis
- » 17-inch steel wheels
- » LED headlamps
- » Body-coloured exterior mirrors with power adjustment
- » Black cloth seat trim
- » Air-conditioning
- » Power windows
- » Vinyl floor covering
- » Intelligent Adaptive Cruise Control (iACC) with Stop & Go[†]
- » Idle Stop System
- » 8-inch full-colour touch screen

- Apple Carplay® (wireless & USB)§
- » Android Auto™ (wireless & USB)§
- Bluetooth® hands-free phone and audio capability§
- » DAB+ digital radio
- » USB-A charging point near rear vision mirror
- USB-C charging points (1 front)
- » Airbags SRS: front (driver & passenger), side, curtain, knee (driver), far-side (driver)
- » Anti-lock Braking System (ABS)†
- » Attention Assist[†]
- » Automatic High Beam (AHB)†

- » Autonomous Emergency Braking(AEB)[†]
- Blind Spot Monitor (BSM)[†]
- Dynamic Stability Control (DSC)†
- Emergency Lane Keeping (ELK) Overtaking[†]
- » Emergency Lane Keeping (ELK) with road edge detection[†]
- » Emergency Stop Signal (ESS)†
- » Hill Descent Control (HDC)[†]
- » Hill Launch Assist (HLA)†
- » Lane Departure Prevention (LDP)[†]
- » Lane Departure Warning (LDW)[†]

- Lane-keep Assist System (LAS)†
- Rear Cross Traffic Alert (RCTA)†
- Rear Cross Traffic Brake (RCTB)†
- Reverse camera
- » Roll Over Protection (ROP)[†]
- Secondary Collision Reduction[†]
- Speed Assist System[†]
- Traction Control System (TCS)[†]
- Turn Assist[†]

POWERTRAIN

- 2.2 litre in-line 4 cylinder16 valve DOHC intercooled turbodiesel with Idle Stop System
- Drivetrain: 4x2
- Transmission: 8-speed automatic
- Max power: 120kW @ 3,600 rpm
- Max torque: 400Nm @ 1,600-2,400rpm
- Fuel consumption (combined): 6.9L/100km*

§ Please check the compatibility of your device (particularly your mobile phone) with your Mazda Dealer as not all devices support connectivity or use all available features. † Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times. *Fuel consumption figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption of different vehicles. They may not be the fuel consumption achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven.





MAZDA BT-50 SINGLE CAB XT

- Cab chassis
- » 17-inch alloy wheels
- » LED headlamps
- » Body-coloured exterior mirrors with power adjustment
- » Black cloth seat trim
- » Air-conditioning
- » Power windows
- » Vinyl floor covering
- Intelligent Adaptive Cruise Control (iACC) with Stop & Go[†]
- » Idle Stop System
- » 8-inch full-colour touch screen
- » Apple Carplay® (wireless & USB)§

- » Android Auto™ (wireless & USB)§
- » Bluetooth® hands-free phone and audio capability§
- » DAB+ digital radio
- » USB-A charging point near rear vision mirror
- USB-C charging points (1 front)
- Airbags SRS: front (driver & passenger), side, curtain, knee (driver), far-side (driver)
- Anti-lock Braking System (ABS)[†]
- » Attention Assist[†]
- » Automatic High Beam (AHB)[†]
- Autonomous Emergency Braking(AEB)[†]

- Blind Spot Monitor (BSM)[†]
- » Dynamic Stability Control (DSC)†
- Emergency Lane Keeping (ELK) Overtaking[†]
- Emergency Lane Keeping (ELK) with road edge detection[†]
- Emergency Stop Signal (ESS)[†]
- » Hill Descent Control (HDC)[†]
- Hill Launch Assist (HLA)[†]
- » Lane Departure Prevention (LDP)†
- » Lane Departure Warning (LDW)[†]
- » Lane-keep Assist System (LAS)[†]
- » Locking Rear Differential (LRD) switchable on/off (4X4 models)

- Rear Cross Traffic Alert (RCTA)[†]
- Rear Cross Traffic Brake (RCTB)†
- Reverse camera
- Roll Over Protection (ROP)[†]
- Rough Terrain Mode (4X4 only)
- Secondary Collision Reduction[†]
- Speed Assist System[†]
- Traction Control System (TCS)[†]
- Turn Assist[†]

POWERTRAIN

- 3.0 litre in-line 4 cylinder
 16 valve DOHC intercooled turbo
 diesel with Idle Stop System
- Drivetrain: 4x2 or 4x4
- Transmission: 6-speed automatic
- Max power: 140kW @ 3,600 rpm
- Max torque: 450Nm @ 1,600-2,600rpm
- Fuel consumption (combined): 7.8L/100km* (4x2 and 4x4)

§ Please check the compatibility of your device (particularly your mobile phone) with your Mazda Dealer as not all devices support connectivity or use all available features. † Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times. * Fuel consumption figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption of different vehicles. They may not be the fuel consumption achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven.





MAZDA BT-50 FREESTYLE CAB XT

- Cab chassis
- » 17-inch alloy wheels
- » Freestyle door system
- » LED headlamps
- » Body-coloured exterior mirrors with power adjustment
- » Black cloth seat trim
- » Air-conditioning
- » Power windows
- » Vinyl floor covering
- Intelligent Adaptive Cruise Control (iACC) with Stop & Go[†]
- » Idle Stop System
- » 8-inch full-colour touch screen

- » Apple Carplay® (wireless & USB)§
- » Android Auto™ (wireless & USB)§
- Bluetooth® hands-free phone and audio capability§
- » DAB+ digital radio
- USB-A charging point near rear vision mirror
- USB-C charging points (1 front)
- » Airbags SRS: front (driver & passenger), side, curtain, knee (driver), far-side (driver)
- » Anti-lock Braking System (ABS)[†]
- Attention Assist[†]
- » Automatic High Beam (AHB)†

- » Autonomous Emergency Braking(AEB)[†]
- » Blind Spot Monitor (BSM)[†]
- Dynamic Stability Control (DSC)†
- Emergency Lane Keeping (ELK) Overtaking[†]
- Emergency Lane Keeping (ELK) with road edge detection[†]
- » Emergency Stop Signal (ESS)†
- Hill Descent Control (HDC)[†]
- » Hill Launch Assist (HLA)†
- » Lane Departure Prevention (LDP)[†]
- » Lane Departure Warning (LDW)[†]
- » Lane-keep Assist System (LAS)†

- Locking Rear Differential (LRD) switchable on/off (4X4 models)
- » Rear Cross Traffic Alert (RCTA)†
- Rear Cross Traffic Brake (RCTB)[†]
- Reverse camera
- Roll Over Protection (ROP)[†]
- Rough Terrain Mode (4X4 only)
- » Secondary Collision Reduction[†]
- » Speed Assist System†
- » Traction Control System (TCS)†
- » Turn Assist†

POWERTRAIN

- 3.0 litre in-line 4 cylinder
 16 valve DOHC intercooled turbo
 diesel with Idle Stop System
- Drivetrain: 4x2 or 4x4
- » Transmission: 6-speed automatic
- Max power: 140kW @ 3,600 rpm
- Max torque: 450Nm @ 1,600-2,600rpm
- Fuel consumption (combined): 7.8L/100km* (4x2 and 4x4)

§ Please check the compatibility of your device (particularly your mobile phone) with your Mazda Dealer as not all devices support connectivity or use all available features. † Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times. * Fuel consumption figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption of different vehicles. They may not be the fuel consumption achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven.





MAZDA BT-50 DUAL CAB XS

- » Cab chassis or Pickup
- » 17-inch steel wheels (17-inch alloy wheels 4x4 pickup)
- » LED headlamps
- » Body-coloured exterior mirrors with power adjustment
- » Tailgate Assist (pickup models only)
- » Black cloth seat trim
- » Air-conditioning with rear vents
- » Power windows
- » Vinyl floor covering
- » Idle Stop System
- Intelligent Adaptive Cruise Control (iACC) with Stop & Go[†]

- 8-inch full-colour touch screen
- » Apple Carplay® (wireless & USB)§
- Android Auto™ (wireless & USB)§
- » Bluetooth® hands-free phone and audio capability§
- » DAB+ digital radio
- » USB-A charging point near rear vision mirror
- USB-C charging points (1 front, 1 rear)
- » Airbags SRS: front (driver & passenger), side, curtain, knee (driver), far-side (driver)
- » Anti-lock Braking System (ABS)[†]
- » Attention Assist[†]

- Automatic High Beam (AHB)[†]
- » Autonomous Emergency Braking(AEB)[†]
- Blind Spot Monitor (BSM)[†]
- Dynamic Stability Control (DSC)[†]
- Emergency Lane Keeping (ELK) -Overtaking[†]
- Emergency Lane Keeping (ELK) with road edge detection[†]
- Emergency Stop Signal (ESS)[†]
- » Hill Descent Control (HDC)[†]
- Hill Launch Assist (HLA)[†]
- Lane Departure Prevention (LDP)[†]
- » Lane Departure Warning (LDW)[†]

- Lane-keep Assist System (LAS)†
- Locking Rear Differential (LRD) switchable on/off (4X4 models)
- Rear Cross Traffic Alert (RCTA)†
- » Rear Cross Traffic Brake (RCTB)[†]
- » Rear parking sensors (pickup only)
- Reverse camera
- Roll Over Protection (ROP)[†]
- » Rough Terrain Mode (4X4 only)
- » Secondary Collision Reduction[†]
- » Speed Assist System[†]
- » Traction Control System (TCS)[†]
- » Turn Assist[†]

POWERTRAIN

- 2.2 litre in-line 4 cylinder16 valve DOHC intercooled turbo diesel with Idle Stop System
- Drivetrain: 4x2 (pick-up only) or 4x4
- » Transmission: 8-speed automatic
- Max power: 120kW @ 3,600 rpm
- Max torque: 400Nm @ 1,600-2,400rpm
- Fuel consumption (combined): 7.1L/100km* (4x4 cab chassis) or 6.3L/100km* (4x2 pickup) or 6.6L/100km* (4x4 pickup)

§ Please check the compatibility of your device (particularly your mobile phone) with your Mazda Dealer as not all devices support connectivity or use all available features. † Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times. * Fuel consumption figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption of different vehicles. They may not be the fuel consumption achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven.





MAZDA BT-50 DUAL CAB XT

- Cab chassis or Pickup
- » 17-inch alloy wheels
- » LED headlamps
- » Body-coloured exterior mirrors with power adjustment
- » Tailgate Assist (pickup models only)
- » Black cloth seat trim
- » Air-conditioning with rear vents
- » Power windows
- » Vinyl floor covering
- » Idle Stop System
- » Intelligent Adaptive Cruise Control (iACC) with Stop & Go[†]

- » 8-inch full-colour touch screen
- Apple Carplay® (wireless & USB)§
- Android Auto™ (wireless & USB)§
- Bluetooth® hands-free phone and audio capability§
- » DAB+ digital radio
- USB-A charging point near rear vision mirror
- USB-C charging points (1 front, 1 rear)
- » Airbags SRS: front (driver & passenger), side, curtain, knee (driver), far-side (driver)
- » Anti-lock Braking System (ABS)[†]
- » Attention Assist[†]

- » Automatic High Beam (AHB)†
- » Autonomous Emergency Braking(AEB)†
- Blind Spot Monitor (BSM)†
- Dynamic Stability Control (DSC)[†]
- Emergency Lane Keeping (ELK) Overtaking[†]
- Emergency Lane Keeping (ELK) with road edge detection[†]
- » Emergency Stop Signal (ESS)†
- Hill Descent Control (HDC)[†]
- Hill Launch Assist (HLA)[†]
- » Lane Departure Prevention (LDP)†
- » Lane Departure Warning (LDW)[†]

- Lane-keep Assist System (LAS)[†]
- » Locking Rear Differential (LRD) switchable on/off (4X4 models)
- Rear Cross Traffic Alert (RCTA)†
- » Rear Cross Traffic Brake (RCTB)[†]
- » Rear parking sensors[†] (pickup only)
- Reverse camera
- Roll Over Protection (ROP)[†]
- » Rough Terrain Mode (4X4 only)
- » Secondary Collision Reduction[†]
- Speed Assist System[†]
- Traction Control System (TCS)†
- » Turn Assist†

POWERTRAIN

- 3.0 litre in-line 4 cylinder
 16 valve DOHC intercooled turbo
 diesel with Idle Stop System
- Drivetrain: 4x2 or 4x4
- Transmission: 6-speed automatic
- Max power: 140kW @ 3,600 rpm
- Max torque: 450Nm @ 1,600-2,600rpm
- Fuel consumption (combined): 7.8L/100km* (4x2 and 4X4 cab chassis) or 7.1L/100km* (4x2 pickup)

§ Please check the compatibility of your device (particularly your mobile phone) with your Mazda Dealer as not all devices support connectivity or use all available features. † Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times. *Fuel consumption figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption of different vehicles. They may not be the fuel consumption achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven.





MAZDA BT-50 DUAL CAB XTR — ADDITIONAL TO XT

- » Cab chassis or Pickup
- » 18-inch black and machined alloy wheels
- » Front fog lamps (LED)
- » LED headlamps with auto levelling
- » Power folding exterior mirrors
- » Side steps (silver)
- » Signature daytime running lamps

- Tow bar with reciever, tongue and wiring harness
- » Tub liner (pickup models only)
- 9-inch full-colour touch screen
- » Advanced keyless entry
- Auto-dimming interior mirror
- » Carpet floor covering
- Dual zone climate control airconditioning with rear vents

- Leather wrapped steering wheel and gear knob
- Rear seat with centre armrest
- » Satellite navigation
- Tyre Pressure Monitoring System (TPMS)
- USB-C charging points (2 front, 1 rear)

POWERTRAIN

- 3.0 litre in-line 4 cylinder
 16 valve DOHC intercooled turbo
 diesel with Idle Stop System
- » Drivetrain: 4x2 (pick-up only) or 4x4
- » Transmission: 6-speed automatic
- » Max power: 140kW @ 3,600 rpm

- Max torque: 450Nm @ 1,600-2,600rpm
- Fuel consumption (combined): 7.8L/100km* (4x4 cab chassis) or 7.1L/100km* (4x2 and 4x4 pickup)

§ Please check the compatibility of your device (particularly your mobile phone) with your Mazda Dealer as not all devices support connectivity or use all available features. † Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times. *Fuel consumption figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption of different vehicles. They may not be the fuel consumption achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven.





MAZDA BT-50 DUAL CAB GT — ADDITIONAL TO XTR

- Cab chassis or Pickup
- » Heated exterior mirrors
- » Black leather seat trim#
- » Driver's seat with 8-way power adjustment
- Heated front seats
- » Remote engine start
- Front parking sensors[†] (pickup only)

POWERTRAIN

- 3.0 litre in-line 4 cylinder
 16 valve DOHC intercooled turbo
 diesel with Idle Stop System
- » Drivetrain: 4x4
- Transmission: 6-speed automatic
- » Max power: 140kW @ 3,600 rpm
- Max torque: 450Nm @ 1,600-2,600rpm
- Fuel consumption (combined): 7.8L/100km* (4x4 cab chassis) or 7.1L/100km* (4x4 pickup)

§ Please check the compatibility of your device (particularly your mobile phone) with your Mazda Dealer as not all devices support connectivity or use all available features. † Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times. *Fuel consumption figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption of different vehicles. They may not be the fuel consumption achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven. #Leather interior includes some Maztex material on selected high impact surfaces. ^ Please check relevant state or territory road/road safety/traffic rules or regulations before using Remote Engine Start.





MAZDA BT-50 DUAL CAB SP — ADDITIONAL TO GT

- » Pickup
- » 18-inch black alloy wheels
- » Gloss black sail plane sports bar
- » Gloss black side steps
- » Gloss black fender flares
- » Gloss black roof rails


- » Gloss black exterior mirrors
- » Gloss black door and tailgate handles
- » Roller tonneau cover (manual operation)
- » Black & terracotta Maztex& cloth seat trim

POWERTRAIN

- 3.0 litre in-line 4 cylinder
 16 valve DOHC intercooled turbo
 diesel with Idle Stop System
- » Drivetrain: 4x4
- » Transmission: 6-speed automatic
- » Max power: 140kW @ 3,600 rpm
- Max torque: 450Nm @ 1,600-2,600rpm
- Fuel consumption (combined):7.8L/100km*

^{*}Fuel consumption figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption of different vehicles. They may not be the fuel consumption achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven.

CHOOSE YOUR COLOUR AND TRIMS

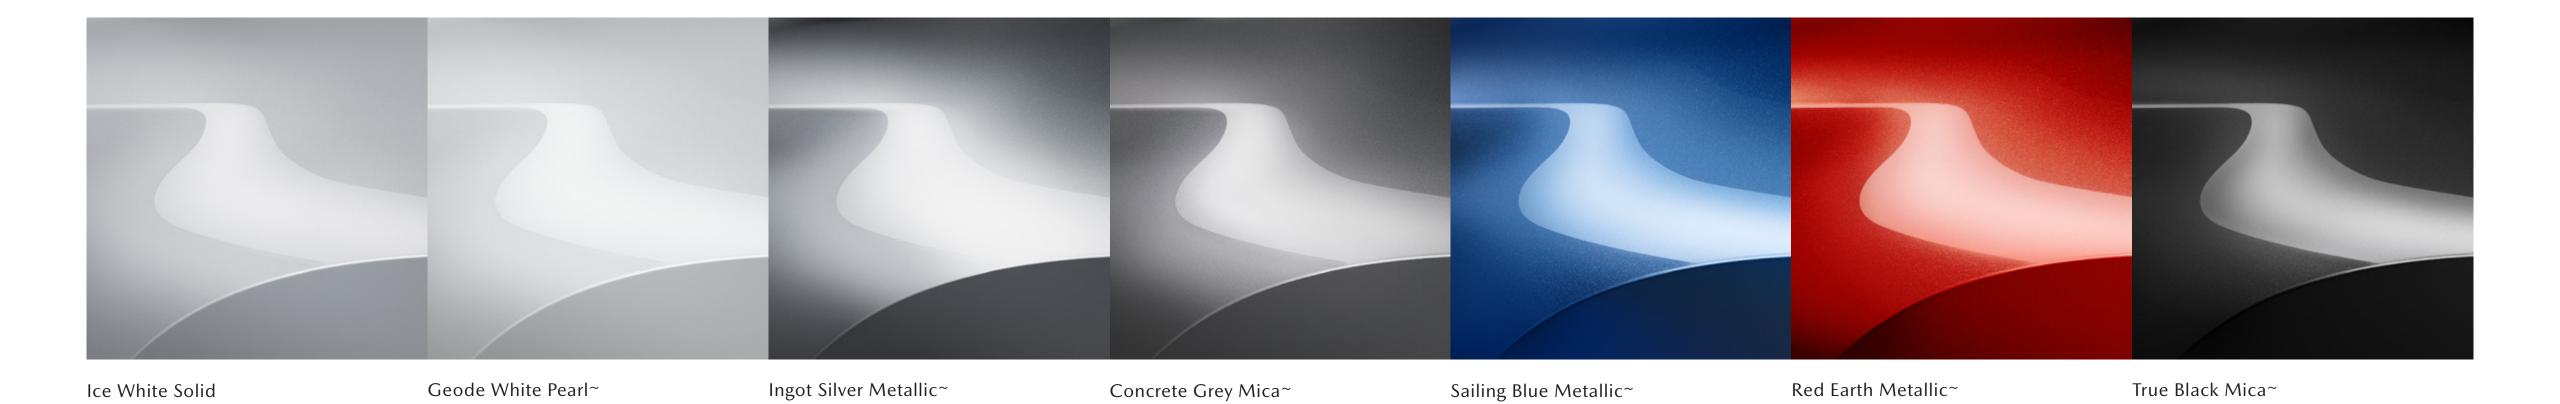



synthetic suede

on XTR and GT models

SP model

[~]At extra cost. #Leather interior includes some Maztex material on selected high impact surfaces.

SPECIFICATION	DNS				4X2			
Powertrain		Single Cab Chassis XS	Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR
Engine type		2.2 litre in-line 4 cylinder 16 valve DOHC intercooled turbo diesel with Idle Stop System		3.0 litre in-line 4 cylinder 16 valve intercooled turbo diesel with Idle Sto		2.2 litre in-line 4 cylinder 16 valve DOHC intercooled turbo diesel with Idle Stop System		linder 16 valve DOHC sel with Idle Stop System
Engine capacity		2,164cc		2,999cc		2,164cc	2,9	999cc
Bore and stroke		83.0mm x 100.0mm		95.4mm x 104.9mm		83.0mm x 100.0mm	95.4mm	x 104.9mm
Compression ratio		15.9:1		16.3 : 1		15.9:1	16	.3:1
Maximum power		120kW @ 3,600 rpm		140kW @ 3,600 rpm		120kW @ 3,600 rpm	140kW @	9 3,600 rpm
Maximum torque		400 @ 1,600-2,400 rpm		450 @ 1,600-2,600 rpm		400 @ 1,600-2,400 rpm	450 @ 1,60	00-2,600 rpm
Throttle control					Electronic (drive-by-wire)			
Fuel system				C	ommon-rail, electronic direct inje	ection		
Fuel tank capacity					76 litres			
Recommended fuel					Diesel			
Fuel consumption*	Combined	6.9		7.8		6.3	7.1	7.1
	Extra urban	6.3		7.4		5.5	6.4	6.5
	Urban	8.1		8.4		7.8	8.3	8.3
CO ₂ Emissions (g/km)*	Combined	183		204		167	185	187
Emissions standard					Euro stage V			
Alternator					12 volts - 90 amps			
Automatic transmission		8-speed		6-speed		8-speed	6-9	speed
Gear ratio	1st	4.903		3.600		4.903	3	.600
	2nd	3.120		2.090		3.120	2	.090
	3rd	2.166		1.488		2.166	1	.488
	4th	1.597		1.000		1.597	1	.000
	5th	1.312		0.687		1.312	0	.687
	6th	1.000		0.580		1.000	0	.580
	7th	0.776		_		0.776		_
	8th	0.651		_		0.651		_
	reverse	4.050		3.732		4.050	3	.732
	final drive	3.583		3.727		3.583	3	.727

^{*} Fuel consumption and CO₂ figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption and emissions of different vehicles. They may not be achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven.

SPECIFICAT	IONS						4X4					
Powertrain		Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Engine type		DOHC interco	ne 4 cylinder 16 valve poled turbo diesel with Stop System	2.2 litre in-line 4 cylinder 16 valve DOHC intercooled turbo diesel with Idle Stop System		ne 4 cylinder 16 valve bo diesel with Idle Sto		2.2 litre in-line 4 cylinder 16 valve DOHC intercooled turbo diesel with Idle Stop System	3.0 litre i		alve DOHC intercooled e Stop System	turbo diesel
Engine capacity			2,999сс	2,164cc		2,999сс		2,164cc		2	2,999cc	
Bore and stroke		95.4m	nm x 104.9mm	83.0mm x 100.0mm		95.4mm x 104.9r	nm	83.0mm x 100.0mm		95.4mı	m x 104.9mm	
Compression ratio			16.3 : 1	15.9 : 1		16.3 : 1		15.9:1		1	6.3:1	
Maximum power		140kV	V @ 3,600 rpm	120kW @ 3,600 rpm		140kW @ 3,600 r	pm	120kW @ 3,600 rpm		140kW	@ 3,600 rpm	
Maximum torque		450Nm @	1,600-2,600 rpm	400Nm @ 1,600- 2,400 rpm		450Nm @ 1,600-2,6	00 rpm	400Nm @ 1,600- 2,400 rpm		450Nm @	1,600-2,600 rpm	
Throttle control							Electronic (drive-by-w	ire)				
Fuel system						Com	mon-rail, electronic dire	ct injection				
Fuel tank capacity							76 litres					
Recommended fuel							Diesel					
Fuel consumption*	Combined		7.8	7.1		7.8		6.6		7.1		7.8
	Extra urban		7.4	6.5		7.4		6.5		6.5		7.4
	Urban		8.4	8.2		8.4		8.2		8.3		8.4
CO ₂ Emissions (g/km)*	Combined		204	188		204		174		187		204
Emissions standard							Euro stage V					
Alternator							12 volts - 90 amps					
Automatic transmission			6-speed	8-speed		6-speed		8-speed		ϵ	-speed	
Gear ratio	1st		3.600	4.903		3.600		4.903			3.600	
	2nd		2.090	3.120		2.090		3.120			2.090	
	3rd		1.488	2.166		1.488		2.166			1.488	
	4th		1.000	1.597		1.000		1.597			1.000	
	5th		0.687	1.312		0.687		1.312			0.687	
	6th		0.580	1.000		0.580		1.000			0.580	
	7th		_	0.776		_		0.776			_	
	8th		_	0.651		_		0.651			_	
	reverse		3.732	4.050		3.732		4.050			3.732	
	final drive		3.727	3.583		3.727		3.583			3.727	
Transfer gear	high		1.000	_		1.000		1.000			1.000	
	low		2.482	_		2.482		2.482			2.482	

^{*} Fuel consumption and CO₂ figures are based on ADR 81/02 test results. They are useful in comparing the fuel consumption and emissions of different vehicles. They may not be achieved in practice. This will depend on traffic and road conditions and how the vehicle is driven.

SPECIFICATIO	NS					4X2								
Chassis		Single Cab Chassis XS	Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR					
Brake diameter	front				3	20 mm								
	rear				2	95 mm								
Brake type	front				Vent	ilated disc								
	rear Drum Flectric Power Assist Steering (EPAS)													
Steering type		Electric Power Assist Steering (EPAS)												
Suspension type	front			In	dependent double wishbor	ne with coil springs and anti-r	oll bar							
	rear				Rigid (live) rear axle v	with heavy-duty leaf springs								
Turning circle	kerb to kerb				1	12.5 m								
Tyre size					255/65 R17				265/60 R18					
Tyre index						110S								
Wheel size					17 x 7.0 J				18 x 7.5 J					
Wheel type		Steel	Alloy	Alloy	Steel	Alloy	Steel	Alloy	Alloy					
Wheel size (spare)					17 x 7.0 J				18 x 7.5 J					
Wheel type (spare)					Steel				Alloy					

							4X4					
Chassis		Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Brake diameter	front						320 mm					
	rear						295 mm					
Brake type	front						Ventilated disc					
	rear						Drum					
Steering type						Electri	c Power Assist Steeri	ng (EPAS)				
Suspension type	front					Independent double	wishbone with coil	springs and anti-roll	bar			
	rear		Rigid (live) r	ear axle with heavy-o	duty leaf springs				Rigid (live) rear a	xle with leaf springs		
Turning circle	kerb to kerb						12.5 m					
Tyre size			255,	/65 R17		265,	′60 R18	255/	/65 R17		265/60 R18	
Tyre index							110S					
Wheel size			17	x 7.0 J		18	x 7.5 J	17	x 7.0 J		18 x 7.5 J	
Wheel type		Steel	Alloy	Steel	Alloy	A	Alloy	A	Alloy		Alloy	
Wheel size (spare)			17	x 7.0 J		18	x 7.5 J	17	x 7.0 J		18 x 7.5 J	
Wheel type (spare)		Steel	Steel	Steel	Steel	Alloy	Alloy	Steel	Steel	Alloy	Alloy	Alloy

SPECIFICATION	ONS				4X2									4X4					
Weights and capacities		Single Cab Chassis XS	Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Axle capacity	front				1,450 kg									1,450 kg					
	rear				1,910 kg									1,910 kg					
Gross Combined Mass (GCM) ¹					5,850 kg									6,000 kg					
Gross Vehicle Mass (GVM) ²					3,000 kg									3,100 kg					
Kerb weight ³		1,643 kg	1,684 kg	1,755 kg	1,806 kg	1,888 kg	1,929 kg	2,012 kg	1,770 kg	1,841 kg	1,852 kg	1,892 kg	1,956 kg	1,959 kg	1,961 kg	2,015 kg	2,098 kg	2,102 kg	2,176 kg
Kerb weight when fitted with <i>N</i> Standard Alloy Tray ³	1azda	1,787 kg	1,828 kg	1,880 kg	1,920 kg	_	_	_	1,914 kg	1,966 kg	1,966 kg	2,006 kg	2,070 kg	2,073 kg	_	_	_	_	_
Maximum payload ⁴		1,357 kg	1,316 kg	1,245 kg	1,194 kg	1,112 kg	1,071 kg	988 kg	1,330 kg	1,259 kg	1,248 kg	1,208 kg	1,144 kg	1,141 kg	1,139 kg	1,085 kg	1,002 kg	998 kg	924 kg
Maximum payload when fitted Standard Alloy Tray ⁴	with Mazda	1,213 kg	1,172 kg	1,120 kg	1,080 kg	_	_	_	1,186 kg	1,134 kg	1,134 kg	1,094 kg	1,030 kg	1,027 kg	_	_	_	-	_
Seating capacity		2	2	2	5	5	5	5	2	2	5	5	5	5	5	5	5	5	5
Tow ball download [¶]	maximum				350 kg									350 kg					
Towing capacity [¶]	braked				3,500 kg									3,500 kg					
	unbraked				750 kg									750 kg					

[¶] When fitted with a Mazda Genuine Towing Kit. Subject to State or Territory regulations.

¹ Gross Combined Mass (GCM) is the total permissible combined weight of the vehicle and trailer/caravan being towed including occupants, fuel and cargo.

² Gross Vehicle Mass (GVM) is the total permissible weight of the vehicle including occupants, fuel and cargo.

³ Kerb weight is the unladen weight of the vehicle including all fluids and a full tank of fuel.

⁴ Maximum payload weight is calculated as the difference between GVM and kerb weight. The weight of any vehicle occupants, options, accessories, modifications, cargo and tow ball download must be included when calculating payload weight.

SPECIFICA	TIONS				4X2									4X4					
Dimensions		Single Cab Chassis XS	Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Cargo box floor height to	ground (mm)	_	_	_	_	828 mm	828 mm	833 mm	_	_	_	_	_	_	828 mm	828 mm	833 mm	833 mm	833 mm
Cargo box floor length (r	nm)	_	_	_	_	1,571 mm	1,571 mm	1,571 mm	_	—	_	_	_	_	1,571 mm	1,571 mm	1,571 mm	1,571 mm	1,571 mm
Cargo box floor width bety	ween wheel arches	_	_	_	_	1,120 mm	1,120 mm	1,120 mm	_	_	_	_	_	_	1,120 mm	1,120 mm	1,120 mm	1,120 mm	1,120 mm
Cargo box width at top r	ail (mm)	_	_	_	_	1,530 mm	1,530 mm	1,530 mm	_	_	_	_	_	_	1,530 mm	1,530 mm	1,530 mm	1,530 mm	1,530 mm
Cargo box height (mm)		_	_	_	_	490 mm	490 mm	490 mm	_	_	_	_	_	_	490 mm	490 mm	490 mm	490 mm	490 mm
Ground clearance (mm):	Unladen	235 mm	235 mm	235 mm	235 mm	235 mm	235 mm	240 mm	235 mm	235 mm	235 mm	235 mm	240 mm	240 mm	235 mm	235 mm	240 mm	240 mm	240 mm
Overall height (mm)		1,790 mm	1,790 mm	1,800 mm	1,800 mm	1,785 mm	1,785 mm	1,790 mm	1,790 mm	1,800 mm	1,800 mm	1,800 mm	1,800 mm	1,800 mm	1,785 mm	1,785 mm	1,790 mm	1,790 mm	1,810 mm
Overall length (mm)	Without tow bar tongue	5,320 mm	5,320 mm	5,280 mm	5,280 mm	5,280 mm	5,280 mm	5,280 mm	5,320 mm	5,280 mm	5,280 mm	5,280 mm	5,280 mm	5,280 mm	5,280 mm	5,280 mm	5,280 mm	5,280 mm	5,280 mm
	With tow bar tongue	_	_	-	_	_	_	5,430 mm	_	_	_	_	5,430 mm	5,430 mm	_	_	5,430 mm	5,430 mm	5,460 mm
Overall width (mm)	Excluding mirrors	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm	1,870 mm
	Mirrors folded	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm	1,926 mm
	Mirrors open	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm	2,160 mm
Overhang (mm):	Front	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	905 mm	935 mm
	Rear (without tow bar) tongue)	1,290 mm	1,290 mm	1,250 mm	1,250 mm	1,250 mm	1,250 mm	1,250 mm	1,290 mm	1,250 mm	1,250 mm	1,250 mm	1,250 mm	1,250 mm	1,250 mm	1,250 mm	1,250 mm	1,250 mm	1,250 mm
	Rear (with tow bar) tongue)	_	_	_	_	_	_	1,400 mm	_	_	_	_	1,445 mm	1,445 mm	_	_	1,400 mm	1,400 mm	1,400 mm
Track (mm):	Front	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm
	Rear	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm	1,570 mm
Maximum wading depth	(mm)#	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm	800 mm
Wheelbase (mm)		3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm	3,125 mm
Approach angle (°)		29.6°	29.6°	29.6°	29.6°	30.0°	30.0°	30.4°	29.6°	29.6°	29.6°	29.6°	30.0°	30.0°	30.0°	30.0°	30.4°	30.4°	27.0°
Departure angle (°)		24.6°	24.6°	25.3°	25.3°	23.9°	23.9°	17.9°	24.6°	25.3°	25.3°	25.3°	25.6°	25.6°	23.9°	23.9°	17.9°	17.9°	17.9°
Ramp breakover angle (°)	23.9°	23.9°	23.9°	23.9°	23.3°	23.3°	23.8°	23.9°	23.9°	23.9°	23.9°	24.3°	24.3°	23.3°	23.3°	23.8°	23.8°	24.3°

^{*}Maximum wading depth is possible only when travelling at a consistent speed of 7km/h. Water ingress may occur if speed is not maintained or if the vehicle is stationary in water of more than 350mm depth.

SPECIFICA	ΓΙΟΝS				4X2									4X4					
Exterior		Single Cal Chassis XS	b Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Alloy wheels	17-inch steel	•	_	_	_	•	_	_	_	_	•	_	_	_	_	_	_	_	_
, may wheels	17-inch black alloy	_	•	•	•	_	•	_	•	•	_		_	_	•	•	_	_	_
	18-inch black and machined	_	_	_	_	_	_	•	_	_	_	_	•	•	_	_	•	•	_
	18-inch metallic black	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•
Cargo box features:	Double wall construction	_	_	_	_	•	•	•	_	_	_	_	_	_	•	•	•	•	•
	Interior rope hooks (2)	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•
	Interior rope hooks (4)	_	_	_	_	•	•	•	_	_	_	_	_	_	•	•	•	•	_
	Tub liner	_	_	_	_	_	_		_	_	_	_	_	_	_	_	•	•	•
Tailgate features:	Lockable	-	_	_	_	•	•	•	_	_	_	_	_	_	•	•	•	•	•
	Body colour release handle	_	_	_	_	•	•	_	_	_	_	_	_	_	•	•	_	_	_
	Chrome release handle	_	_	_	_		_	•	_	_	_	_	_	_	_		•	•	_
	Gloss black release handle	-	_	_	_	-	_	•	_	_	_	_	_	_	_	_	_		•
	Tailgate Assist	-	_	_	_	•	•	•	_	_	_	_	_	_	•	•	•	•	•
Roller tonneau cover	Manual operation	-	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•
Daytime running lamps	Halogen	•	•	•	•	•	•	_	•	•	•	•	•	•	•	•	—	_	_
	LED	-	_	_	_	-	_	•	—	_	-	_	-	_	—		•	•	•
Door handles	Body Colour	•	•	•	•	•		_	•	•	•	•	_	_	•	•	_	_	_
	Chrome	-	_	_	_	_	_		_	_	_	_	•	•	_	_	•	•	_
	Gloss black	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•
Fog-lamps	Front	-	_	_	_	_	_		_	_	_	_	•	•	_	_	•	•	•
Freestyle door system		-	_	•	_	_	_	_	_	•	_	_	_	_	_	_	_	_	_
Fuel filler cap	Lockable cap	•	•	•	•	_	_	_	•	•	•	•	•	•	_	_	_	_	_
	Remote release flap	_	_	_	_	•	•	•	_	_	_	_	_	_	•	•	•	•	•
Headlamps (LED)	LED	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Manual levelling	•	•	•	•	•	•	_	•	•	•	•	_	_	•	•	_	_	_
	Auto levelling	-	_	_	_		_	•	—	_	_	_	•	•	_	-	•	•	•
	Signature illumination	-	_	_	_		_	•	_	_	_	_	•	•	_	-	•	•	•
	Auto on/off	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•

 $[\]bullet$ = Standard, \bigcirc = Option, - = Not available.

Automatic High Beam (AHB)†

[†] Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times.

SPECIFICA	TIONS				4X2									4X4					
Exterior		Single Cal Chassis XS	Single Cab Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Single Cal Chassis XT	Freestyle Cab Chassis XT	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Metallic/mica/pearl pair	nt	О	О	O	O	O	О	0	О	О	О	O	O	O	О	О	O	O	О
Mudflaps	Front	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Rear	_	_	_	_	•	•	•	_	_	_	_	_	_	•	•		•	•
Exterior mirrors	Body Colour	•		•	•	•				•	•			_		•		•	_
	Gloss black	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•
	Power adjustment	•			•	•		•			•		•	•		•		•	•
	Auto folding	_	_	_	_	_	_	•	_	_	_	_	_	•	_	_		•	•
	Heated	_	_	_	_	_	_	_	_	_	_	_	_	•	_	_	_	•	•
Power windows		•	•	•			•	•		•	•	•	•	•			•	•	•
Rear step bumper	Body colour	_	_	_	_	•	•	•	_	_	_	_	_	_				•	•
Roof rails	Gloss black	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•
Side steps	Silver	_	_	_	_	_	_	•	_	_	_	_		•	_	_		•	_
	Black	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•
Sports bar	Black sail plane	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•
Tow bar with receiver, to	ngue and wiring harness	_	_	_	_	_	_	•	_	_	_	_		•	_	_		•	
Under-body impact prote	ection	•	•	•	•	•	•	•		•	•	•	•	•	•		•	•	•

 $[\]bullet =$ Standard, $\bigcirc =$ Option, - = Not available.

SPECIFICA	TIONS				4X2									4X4					
		Single Cab Chassis XS	Single Cab Chassis XT	Freestyle Cab Chassis	Dual Cab Chassis XT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Single Cab Chassis XT	Freestyle Cab Chassis	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Interior				XT						XT									
Multi Information	4.2-in Colour LCD	•	•			•	•	_	•	•	•	•	_	_	•	•	_	_	_
Display	7-in Colour LCD	_	_	_	_	_	_		_	_	_	_	•		_	_	•		
Air-conditioning	Manual	•	•		•	•	•	_	•	•	•	•	_	_	•	•	_	_	_
	Dual-zone climate control	_	_	_	_	_	_	•	_	_	_	_	•	•	_	_	•	•	•
Ambient temperature dis	splay	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Auxiliary 12 volt power of	outlet	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Centre armrest console		•	•			•	•		•	•	•	•	•	•	•	•	•		
Convenience hook (rear	of passenger seat)	_	_			•	•		_	•	•		•	•	•	•	•		
Cruise Control	Intelligent Adaptive Cruise Control (iACC) with Stop & Go [†]	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Traffic Jam Assist [†]	•		•	•	•	•	•	•	•	•	•	•	•	•	•			
Idle Stop System		•		•		•	•			•	•	•	•	•	•	•	•	•	
Cupholders	Front	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2
	Rear	_	_	_	_	_	_	2	_	_	_	_	2	2	_	_	2	2	2
Door pockets		•								•	•	•	•	•	•		•		
Driver's left footrest		•								•		•	•	•	•		•		
Floor covering:	Vinyl	•		•		•	•	_		•	•	•	_	_	•		_	_	_
	Carpet	_	_	_	_	_	_	•	_	_	_	_	•	•	_	_	•	•	
Glove box	Upper	•		•		•	•		•	•		•	•	•	•	•	•		
	Lower, lockable			•	•	•	•	•	•	•	•	•	•	•	•	•	•		
Instrument panel light di	mmer			•	•	•	•		•	•	•	•	•	•	•	•	•		
Interior illumination:	Dome lamp	_	_	•		•	•		_	•	•	•	•	•	•	•	•		
	Map reading spot lamps	•				•	•		•	•	•	•	•	•	•	•	•		
Leather-wrapped:	Gear shift knob	_	_	_	_	_	_	•	_	_	_	_	•	•	_	_	•	•	
	Steering wheel	_	_	_	_	_	_		_	_	_	_	•	•	_	_			
Low fuel warning light		•	•	•	•	•	•		•	•	•	•	•	•	•	•	•		
One touch (up and down	n) power window (driver)	•	•	•		•	•		•	•	•	•	•	•	•	•	•		
Overhead sunglass storage	ge box		•			•	•		•	•	•	•	•	•	•	•	•		•
Passenger assist grips		•				•	•		•	•	•	•	•	•	•	•	•		
Rear centre fold-down a	rmrest	_	_	_	_	_	_	•	_	_	_	_	•	•	_	_	•	•	•

 $[\]bullet =$ Standard, - =Not available.

[†] Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times.

SPECIFICATI	ONS				4X2									4X4					
		Single Cal Chassis XS	Single Cab Chassis XT	Freestyle Cab Chassis	Dual Cab Chassis XT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Single Cab Chassis XT	Freestyle Cab Chassis	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Interior				XT						XT									
Rear-view mirror with auto d	imming function	_	_	_	_	_	_	•	_	_	_	_	•	•	_	_		•	•
Tachometer and electronic of	dometer/tripmeter	•	•	•	•	•		•	•		•		•	•	•	•	•	•	•
Tilt and reach adjustable stee	ring wheel	•	•	•	•	•	•	•	•		•			•	•		•	•	
Trip computer		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	
Vanity mirror	Driver	_	_	_	_	_	_	•	_	_	_	_		•	_	_	•	•	•
	Front passenger	•	•	•	•	•	•	•	•		•			•	•	•	•	•	•
Window demister (rear)		•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•
Wipers (front) 2-speed with r	rain-sensing function	•	•	•	•	•	•	•	•	•	•		•	•	•		•	•	
USB-A charging point near re	ar vision mirror	•	•	•	•	•	•	•	•	•	•			•	•		•	•	
USB-C Charging Port	Front	1	1	1	1	1	1	2	1	1	1	1	2	2	1	1	2	2	2
	Rear	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Seats

0 0 0 0 0																				
Front seat (driver	8-way power adjustment	_	_	_	_	_	_	_	_	_	_	_	_	•	_	_	_	•	•	
bucket) with:	Adjustable head restraint	_	_	•	•	•	•	•	_	•	•	•	•	•	•	•	•	•	•	
	Height adjustment	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Lumbar adjustment	_	_	—	_	_	_	•	_		—	_	•	•	_	_	•	•	•	
	Rake and slide adjustment	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Front seat (passenger	Adjustable head restraint	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
bucket) with:	Rake and slide adjustment	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Seat back pocket	_	_	•	•	•	•	•	_	•	•	•	•	•	•	•	•	•	•	
	Seat back convenience hook	_	_	•	•	•	•	•	_	•	•	•	•	•	•	•	•	•	•	
Front seats with:	Heating function	_	_	_	_	_	_	_	_	-	_	_	-	•	—	_	_	•	•	
Rear seat (bench)	Adjustable head restraints	-	_	_	•	•	•	•	_	_	•	•	•	•	•	•	•	•	•	
with:	Centre armrest	_	_	_	_	_	_	•	_	_	_	_	•	•	_	_	•	•	•	
	60/40 foldable seat base and underseat storage	_	-	_	•	•	•	•	-	_	•	•	•	•	•	•	•	•	•	
Seat trim:	Black cloth	•	•	•	•	•	•	•	•	•	•	•	•	_	•	•	•	_	_	
	Black leather#	_	_	_	_	_	_	_	_	_	_	_	_	•	_	_	_	•	_	
	Black & terracotta Maztex & synthetic suede	_	-	_	_	_	_	_	_	_	_	_	_	_	_	-	_	_	•	

 $[\]bullet =$ Standard, - =Not available.

SPECIFIC	CATIONS				4X2									4X4					
		Single Cal Chassis XS	b Single Cal Chassis XT	b Freestyle Cab Chassis	Dual Cab Chassis XT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Single Cab Chassis XT	Cab Chassis	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Infotainment				XT						XT									
8-inch full colour to	uch screen	•	•	•	•	•	•	_			•		_	_	•	•	_	_	_
9-inch full colour to	uch screen	_	_	_	_	_	_		_	_	_	_	•	•	_	_	•	•	•
Radio	AM/FM with Radio Data System (RDS)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	DAB+ digital	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•		•
Apple Carplay®§	Wireless or USB	•	•	•	•	•	•	•	•		•			•	•	•	•		
Android Auto™§	Wireless or USB	•	•	•	•	•	•	•	•		•			•	•	•			•
Bluetooth® hands-fr	ree phone and audio capability§	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•		
Satellite navigation		_	-	_	_	-	_	•	_	_	_	_	•	•	_	-	•	•	
Speakers		2	2	2	4	4	4	6	2	2	6	6	8	8	6	6	8	8	8
Steering wheel-mou	unted audio controls	•	•	•	•	•	•	•	•	•	•				•	•	•		•
USB-C device port§		•	•																

 $[\]bullet =$ Standard, - =Not available.

[§] Please check the compatibility of your device (particularly your mobile phone) with your Mazda Dealer as not all devices support connectivity or use all available features.

SPECIFICATIONS		4X2							4X4										
		Single Cab Chassis XS	Single Cab Chassis XT	Freestyle Cab Chassis	Dual Cab Pickup XT	Dual Cab Chassis XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Single Cab Chassis XT	Freestyle Cab Chassis	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cal Pickup SP
Safety and Security				XT						XT									
Advanced keyless entry with push-button start		-	_	_	_	_	_	•	_	_	_	-	•	•		-	•	•	•
Automatic High Beam (AHB)†		•	•	•	•	•		•		•	•	•	•	•	•	•	•	•	•
Autonomous Emergency Braking (AEB) [†]	Low speed	•	•	•		•		•		•	•	•	•	•	•	•	•	•	•
	High speed	•	•	•		•		•		•	•	•	•	•	•	•	•	•	•
	Pedestrian, cycle and motorcycle detection	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	Turn Assist (car and pedestrian)	•	•	•		•				•	•	•	•	•	•	•	•	•	•
Airbags SRS:	Curtain (front and rear)	_	_	_		•			_	_	•	•	•	•	•	•	•	•	
	Curtain (front)	•		•	_	_	_	_		•	_	_	_	_	_	_	_	_	_
	Front (driver and passenger)	•	•	•		•		•		•	•	•	•	•	•	•	•	•	
	Side (front)	•								•	•	•	•	•			•	•	
	Farside (driver)	•		•		•				•	•	•	•	•	•	•	•	•	•
	Knee (driver)	•	•	•		•		•		•	•	•	•	•	•	•	•	•	
Alarm		•	•	•		•		•		•	•	•	•	•	•	•	•	•	
Anti-lock Braking System (ABS)		•								•	•	•		•	•	•	•		•
Attention Assist [†]		•		•		•		•		•	•	•	•	•	•	•	•	•	•
Blind Spot Support	Blind Spot Monitor (BSM) [†]	•		•	•	•		•		•	•	•	•	•	•	•	•	•	•
	Rear Cross Traffic Alert (RCTA)†	•								•	•	•		•	•	•	•		
	Rear Cross Traffic Brake (RCTB)†	•				•				•	•	•	•	•	•	•	•	•	•
Childproof rear door locks		_	_	_		•		•	_	_	•	•	•	•	•	•	•	•	•
Electronic Stability Control (ESC) [†]		•		•		•		•		•	•	•	•	•	•	•	•	•	
Electronic Brake-forc	e Distribution (EBD)	•				•				•	•	•	•	•	•	•	•	•	•
Brake Assist (BA)†		•		•	•	•		•		•	•	•	•	•	•	•	•	•	•
Emergency Lane Keeping (ELK) – Overtaking [†]		•		•		•		•		•	•	•	•	•	•	•	•	•	
Emergency Stop Signal (ESS)†		•				•				•	•	•	•	•	•	•	•	•	
Engine immobiliser		•		•		•		•		•	•	•	•	•	•	•	•	•	•
Forward Collision Warning (FCW) [†]		•		•		•		•		•	•	•	•	•	•	•	•	•	•
High mount stop lamp		•								•	•	•	•	•	•	•	•	•	•
Hill Descent Control (HDC) [†]		•								•	•	•	•	•	•	•	•	•	•
Hill Launch Assist (HLA)†		•								•	•	•	•	•	•	•	•	•	•
Intelligent Speed Limiter (ISL)†		•								•	•	•	•	•	•	•	•	•	•
Intrusion-minimising brake pedal		•	•	•		•				•	•	•	•	•	•	•	•	•	
ISOFIX child restraint anchor points and top tethers (2)		_	_	_	•	•	•	•	_	_	•	•	•	•	•	•	•	•	•

 $[\]bullet =$ Standard, - =Not available.

[†] Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and conditions and comply with all applicable laws at all times.

SPECIFICATIONS					4X2									4X4					
		Single Cab Chassis XS	Single Cab Chassis XT	Cab Chassis	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Pickup XT	Dual Cab Pickup XTR	Single Cab Chassis XT	Cab Chassis	Dual Cab Chassis XS	Dual Cab Chassis XT	Dual Cab Chassis XTR	Dual Cab Chassis GT	Dual Cab Pickup XS	Dual Cab Pickup XT	Dual Cab Pickup XTR	Dual Cab Pickup GT	Dual Cab Pickup SP
Safety and Security				XT						XT									
Lane Support Lane System	ne Departure Prevention (LDP)†			•	•		•	•	•		•	•			•		•	•	
Lane	ne Departure Warning (LDW)†	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Lane	ne-keep Assist System (LAS)†		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	ergency Lane Keeping (ELK) – th road edge detection [†]	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•
	ergency Lane Keeping (ELK) – ertaking [†]	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Locking Rear Differential (LRD) – switchable on/off			_	_	_	_	_	_	•	•	•	•	•	•	•	•	•	•	•
Manual Speed Limiter (MSL) [†]		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Parking aids Park	king Sensors – Front [†]	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	_	•	•
Park	king Sensors – Rear [†]	_	_	_	•	_	•	•	_	_	_	_	_	_	•	•	•	•	•
Reve	verse camera [†]	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Remote Engine Start#			_	_	_		_	—	—	_	_	_	_	•			—	•	•
Remote central locking (2 transmitters)		•	•	•	•	•	•	•	•		•	•			•	•	•		•
Roll Over Protection (ROP) [†]		•				•		•	•		•	•	•	•	•	•			
Rough Terrain Mode [†]						_					•	•			•	•			
Seat-belt warning From	nt	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•
with occupant detection sensor Real	ar	_	_	_	•	•	•	•	_	_	•	•	•	•	•	•	•	•	•
Seat-belts 3-point lap-sas	ash (all seats)	•				•	•				•	•			•		•		
Seat-belts (front) Heig	ight adjustable shoulder anchorages	•		•		•	•	•	•		•	•			•	•	•		•
Pret	tensioners and load-limiters	•				•					•	•			•				
Seat-belts (rear Fixed outside) with:	ed height shoulder anchorages	_	_	_					_	_	•	•			•				
Pret	tensioners and load-limiters	_	_	_	•	•	•	•	_	_	•	•	•	•	•	•	•	•	•
Seat-belts (rear Fixed centre) with:	ed height shoulder anchorages	_	_	_	•	•	•	•	_	_	•	•	•	•	•	•	•	•	•
Secondary Collision Reduction		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Side impact door beams		•		•	•	•	•	•	•	•	•	•	•	•	•		•	•	
Traction Control System (TCS) [†]		•		•	•	•	•	•	•	•	•	•		•	•	•	•	•	
Traffic Sign Recognition (TSR) [†]		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Trailer Sway Control (TSC) [†]		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Tyre Pressure Monitoring System (TPMS)		_	_	_	_	_	_	•	_	_	_	_	•	•	_	_	•	•	•

 $[\]bullet$ = Standard, — = Not available, A = Automatic transmission only.

[†]Driver assist technology only and should not be used in place of skilled and safe driving practices. It is the driver's sole responsibility to monitor vehicle surroundings and comply with all applicable laws at all times.

[#] Please check relevant state or territory road/road safety/traffic rules or regulations before using Remote Engine Start.



For further information, visit mazda.com.au or Freecall 1800 034 411

All care is taken to ensure the accuracy of this brochure and availability of vehicles and features at the time of publication, however, to the extent permitted by law, Mazda Australia Pty Ltd will not be liable for any loss suffered or incurred by a purchaser or prospective purchaser if the content is inaccurate or not up to date, or if it withdraws any vehicles or features referred to in the brochure from the market. Specifications, features and model availability may vary from state to state and may change without notice. Please refer to mazda.com.au or consult your Mazda Dealer prior to placing an order to ascertain current information on model availability, specifications, options, features and prices. Mazda Australia Pty Ltd ABN 78 004 690 804. 211A Wellington Road, Mulgrave, Victoria 3170.

Due to the nature of the reproduction process, colours may vary from those shown in this brochure. Ask your Dealer to show you a product sample. Published November 2025. AU41-P00003897